
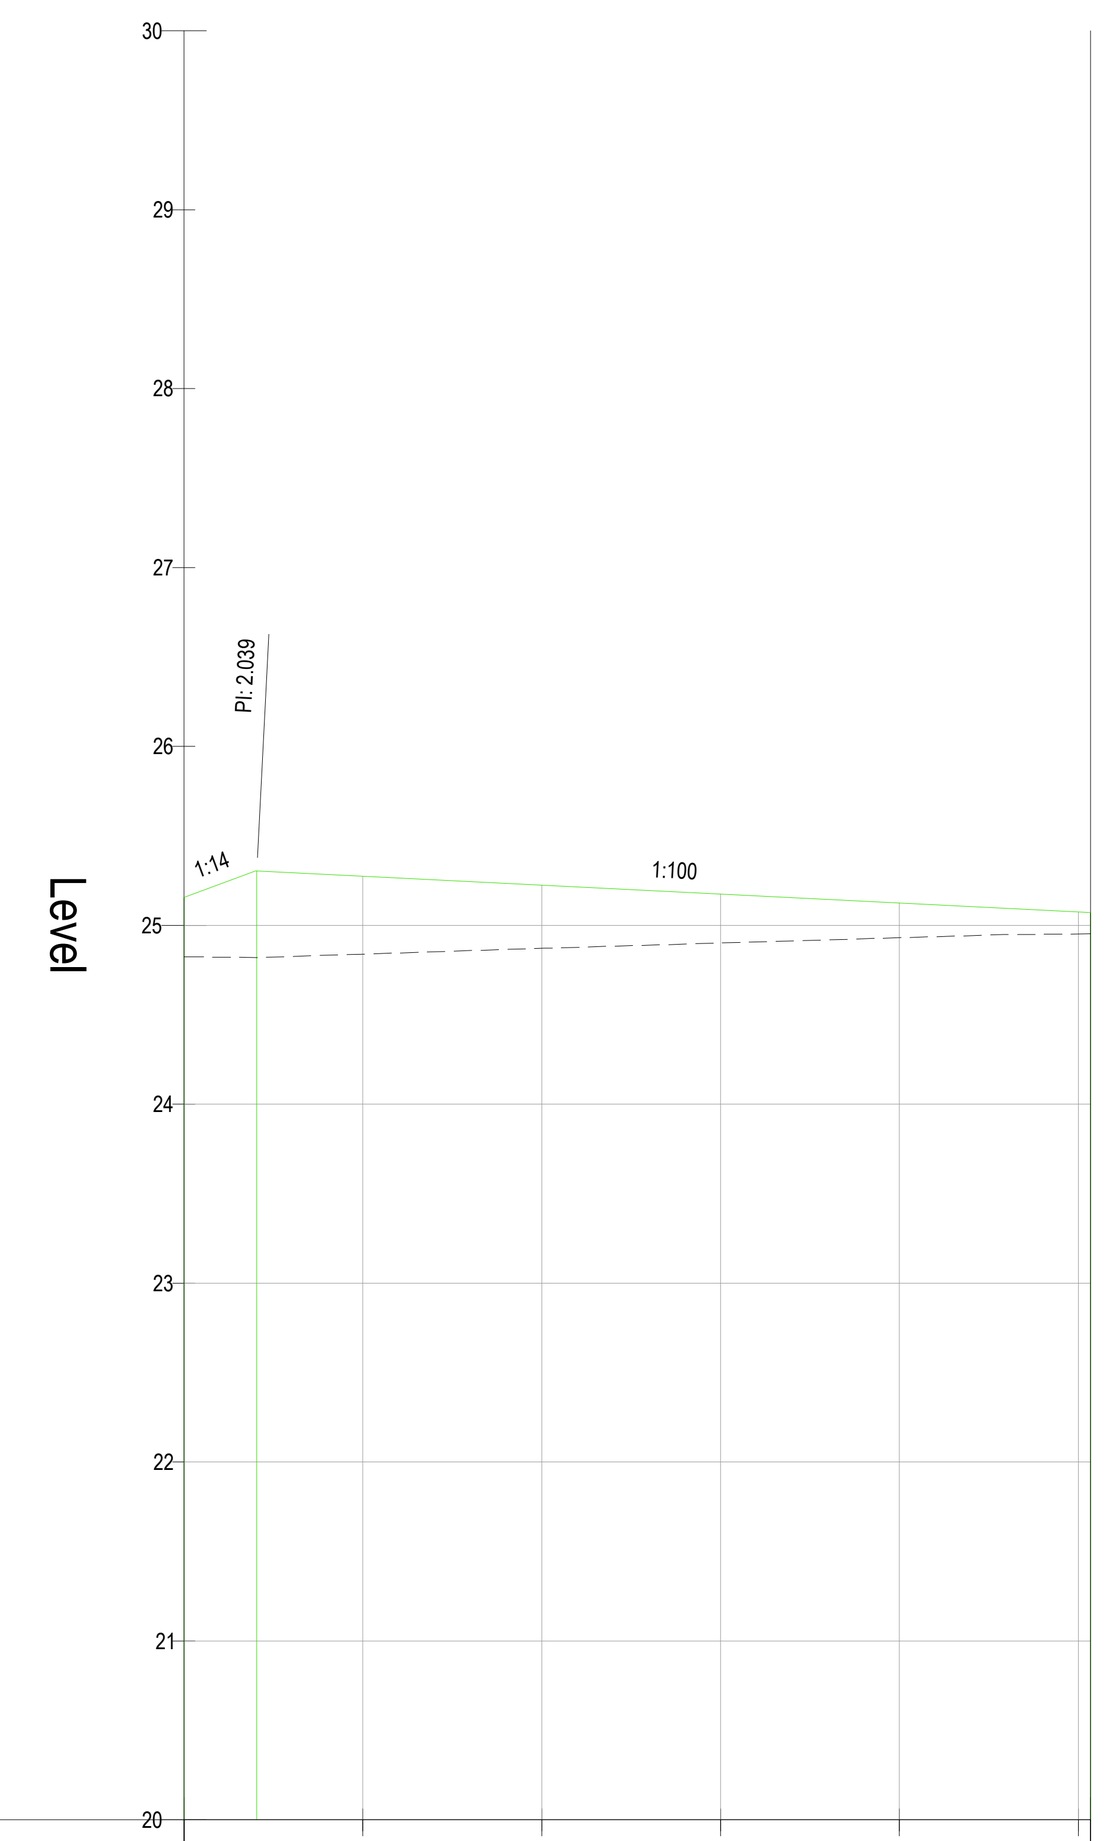



Row						
Chainage	00.000	05.000	10.000	15.000	20.000	25.344 / 25.000
Existing Levels	24.824	24.839	24.871	24.901	24.930	24.952 / 24.952
Proposed Levels	25.156	25.274	25.224	25.174	25.124	25.071 / 25.074
Horizontal Geometry	L =2.039	L =23.305				
Vertical Geometry	G =7.400% L =2.000	G =-1.000% L =23.376				
Surface Water CL						
Surface Water IL						
Surface Water Details						
Foul Water CL						
Foul Water IL						
Foul Water Details						

PD 01 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

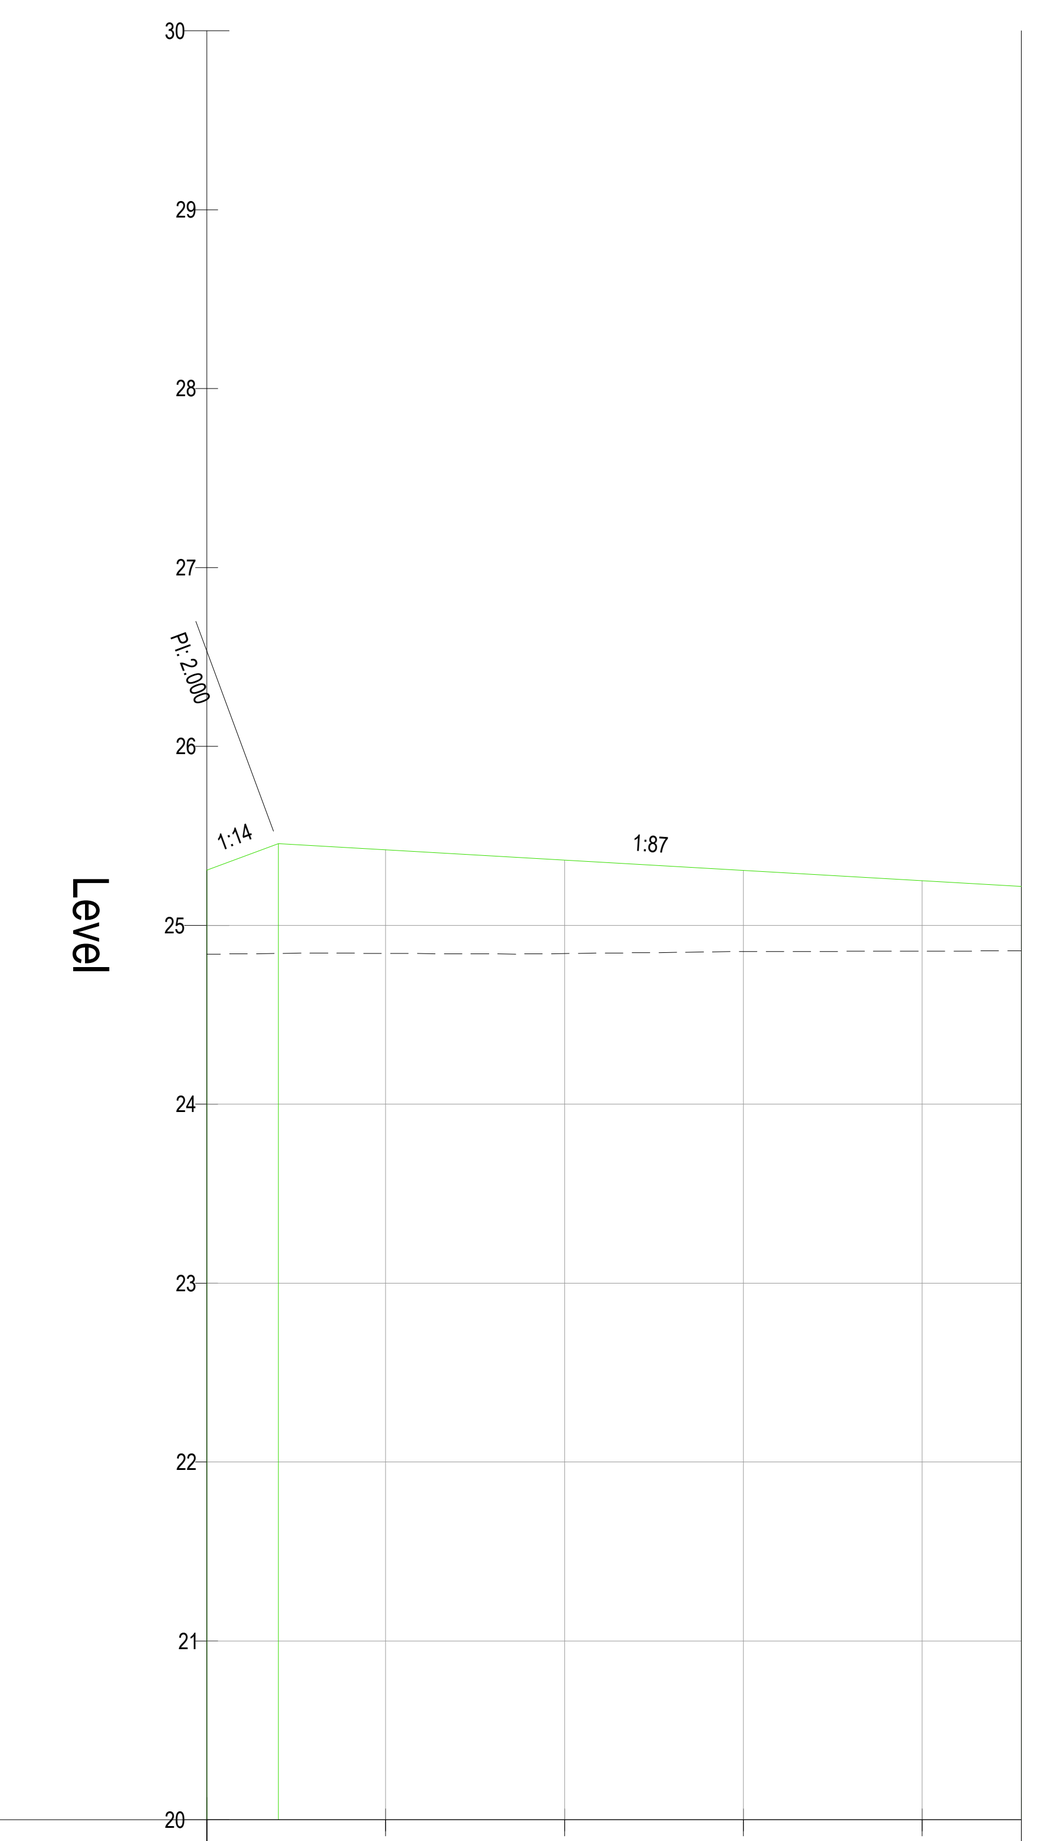


Row						
Chainage	00.000	05.000	10.000	15.000	20.000	22.770
Existing Levels	24.838	24.843	24.842	24.853	24.855	24.857
Proposed Levels	25.308	25.421	25.364	25.306	25.249	25.217
Horizontal Geometry	L =2.000	L =20.770				
Vertical Geometry	G =7.400% L =2.000	G =-1.151% L =20.770				
Surface Water CL						
Surface Water IL						
Surface Water Details						
Foul Water CL						
Foul Water IL						
Foul Water Details						

PD 02 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

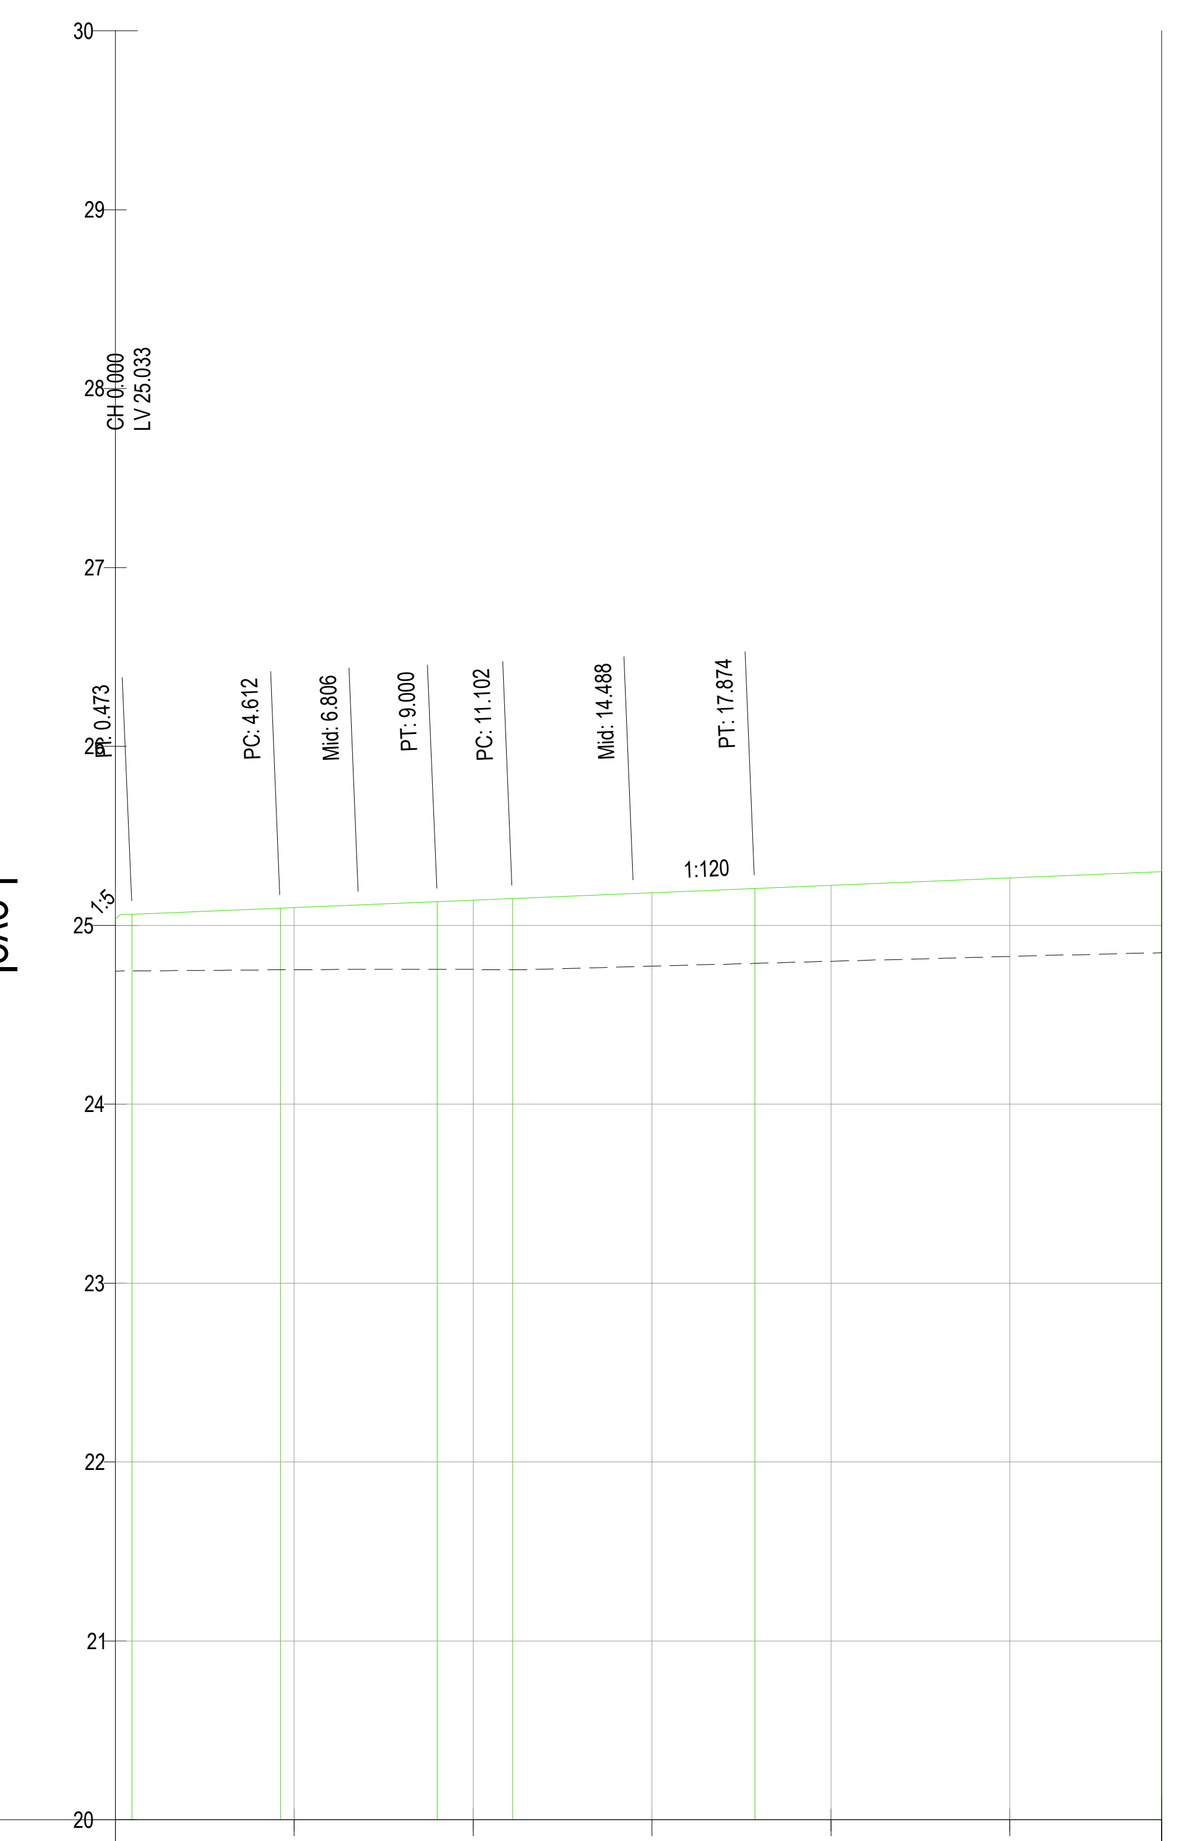


Row							
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	29.247
Existing Levels	24.744	24.752	24.753	24.771	24.799	24.826	24.846
Proposed Levels	25.033	25.099	25.140	25.182	25.224	25.265	25.301
Horizontal Geometry	L =0.473	L =4.139	R: 12.647 L: 4.388	L =2.102	R: 17.741 L: 6.772	L =11.373	
Vertical Geometry	G =20.000% L =0.125	G =0.833% L =32.866					
Surface Water CL							
Surface Water IL							
Surface Water Details							
Foul Water CL							
Foul Water IL							
Foul Water Details							

PD 03 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

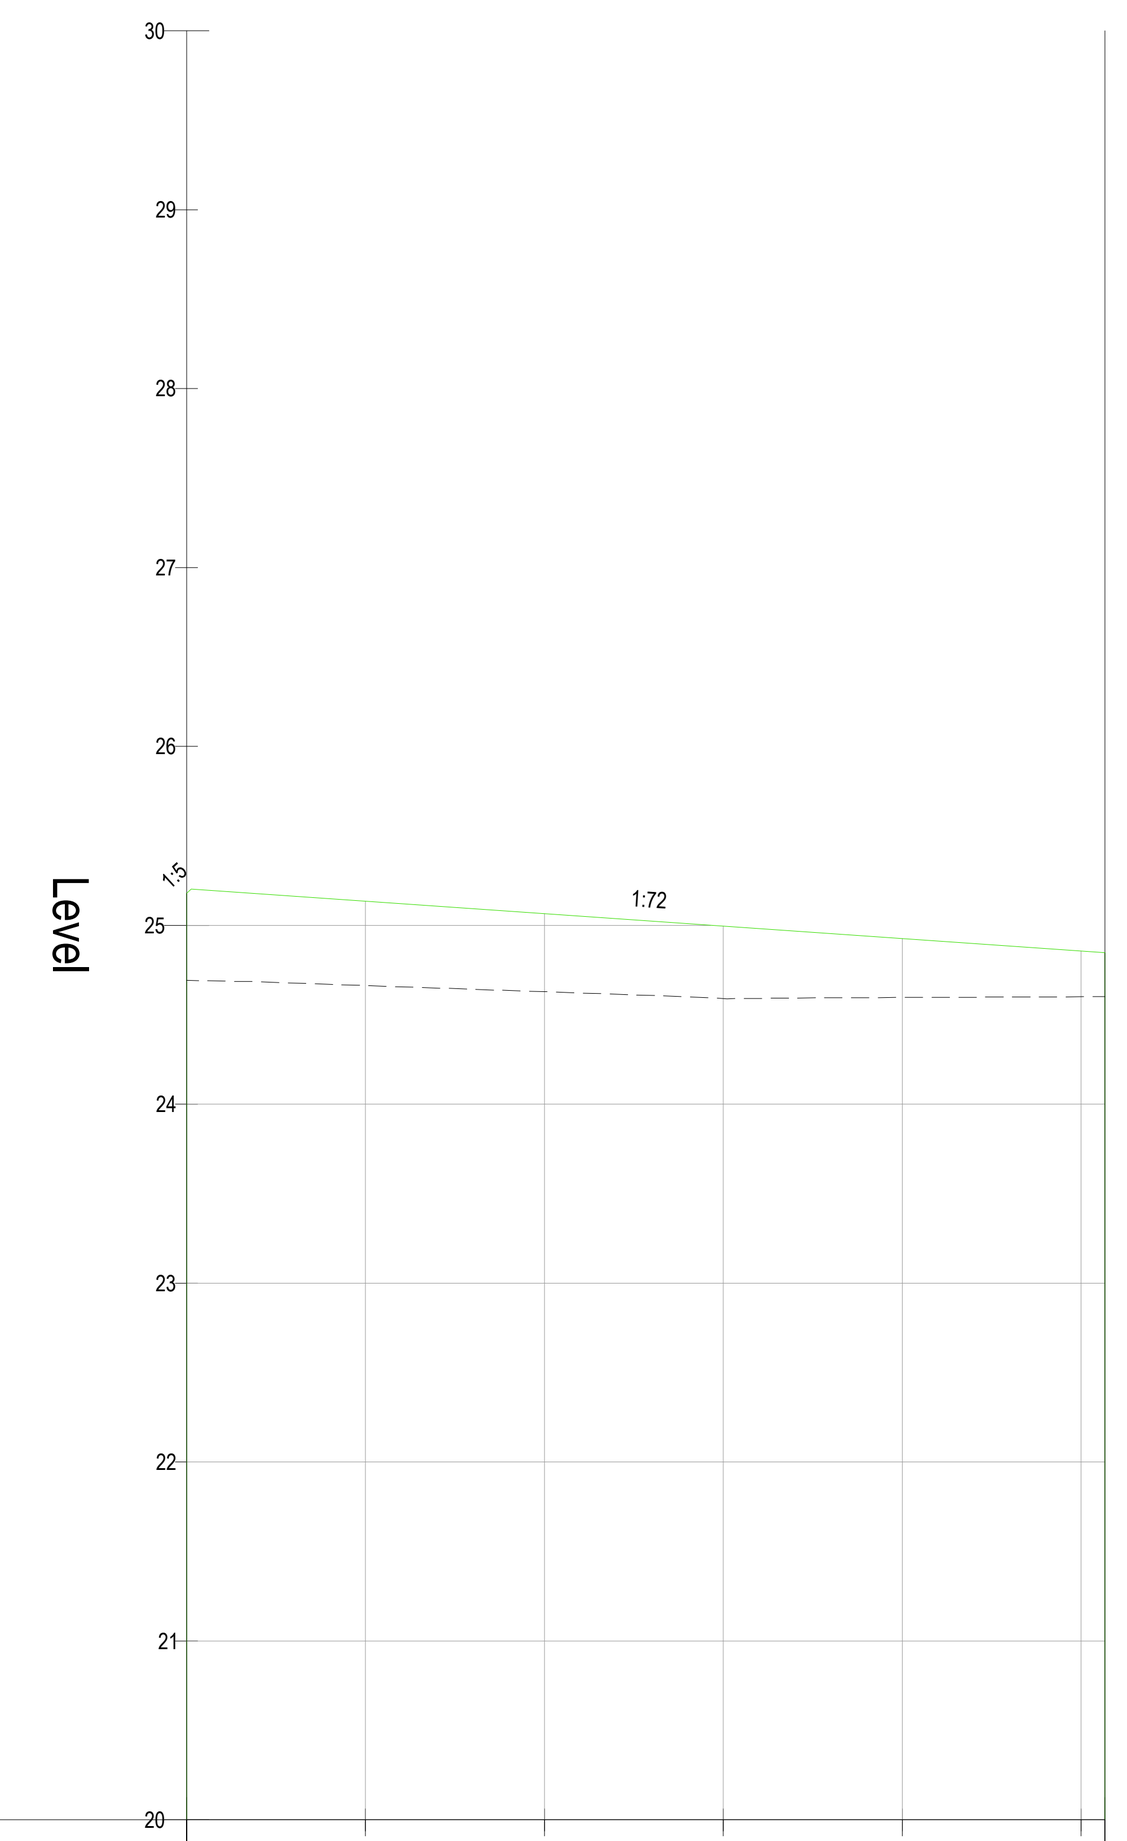


Row							
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	25.661
Existing Levels	24.691	24.663	24.628	24.590	24.596	24.600	24.601
Proposed Levels	25.180	25.135	25.065	24.995	24.925	24.855	24.846
Horizontal Geometry	L =25.661						
Vertical Geometry	G =18.400% L =0.125	G =-1.398% L =25.536					
Surface Water CL							
Surface Water IL							
Surface Water Details							
Foul Water CL							
Foul Water IL							
Foul Water Details							

PD 04 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

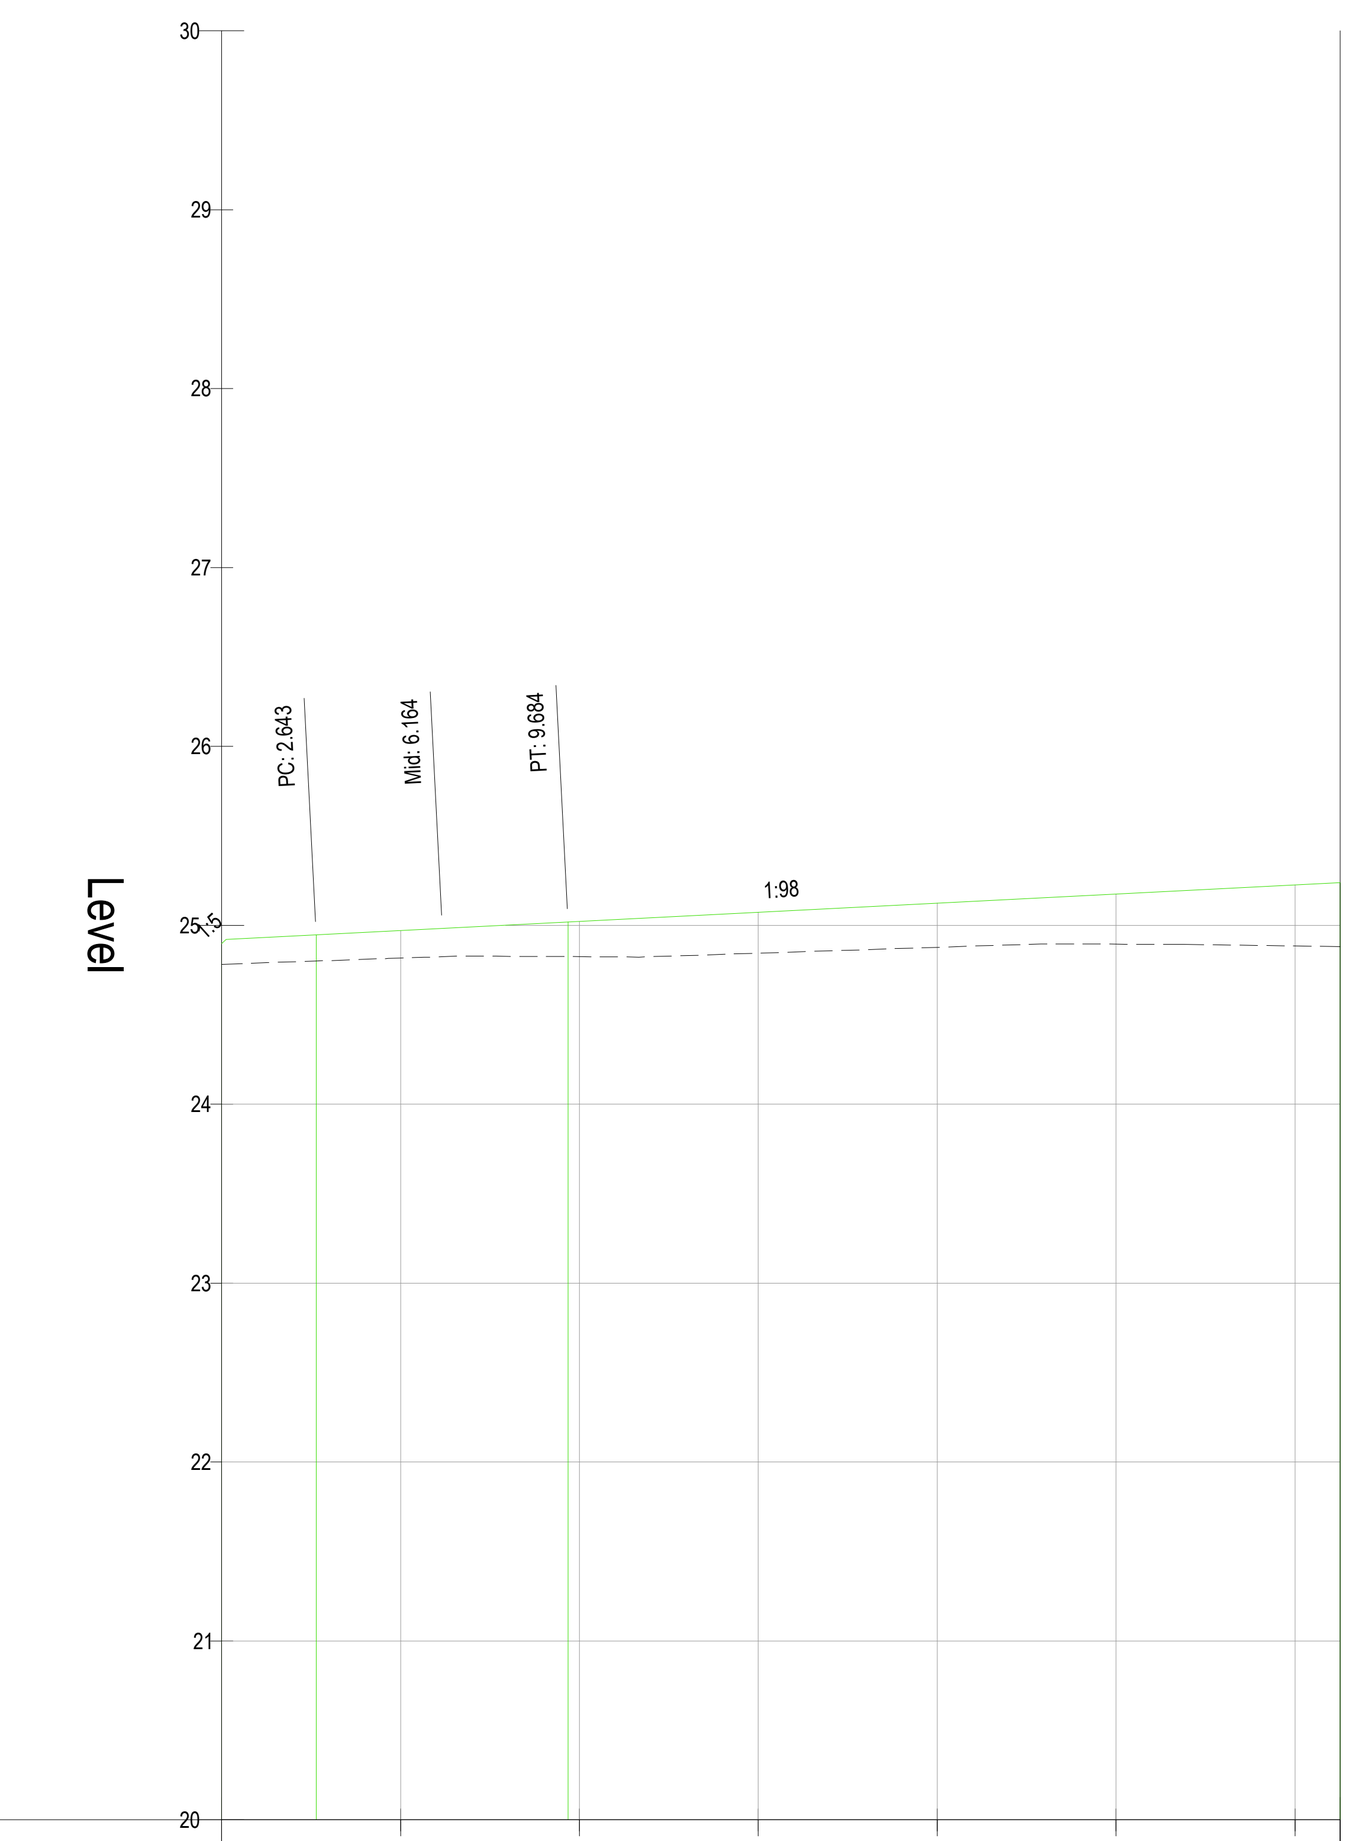


Row							
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	30.000 / 31.264
Existing Levels	24.782	24.817	24.824	24.844	24.877	24.894	24.884 / 24.881
Proposed Levels	24.897	24.970	25.021	25.072	25.124	25.175	25.226 / 25.239
Horizontal Geometry	L =2.643	R: 12.750 L: 7.041	L =21.580				
Vertical Geometry	G =18.400% L =0.125	G =1.024% L =31.139					
Surface Water CL							
Surface Water IL							
Surface Water Details							
Foul Water CL							
Foul Water IL							
Foul Water Details							

PD 05 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

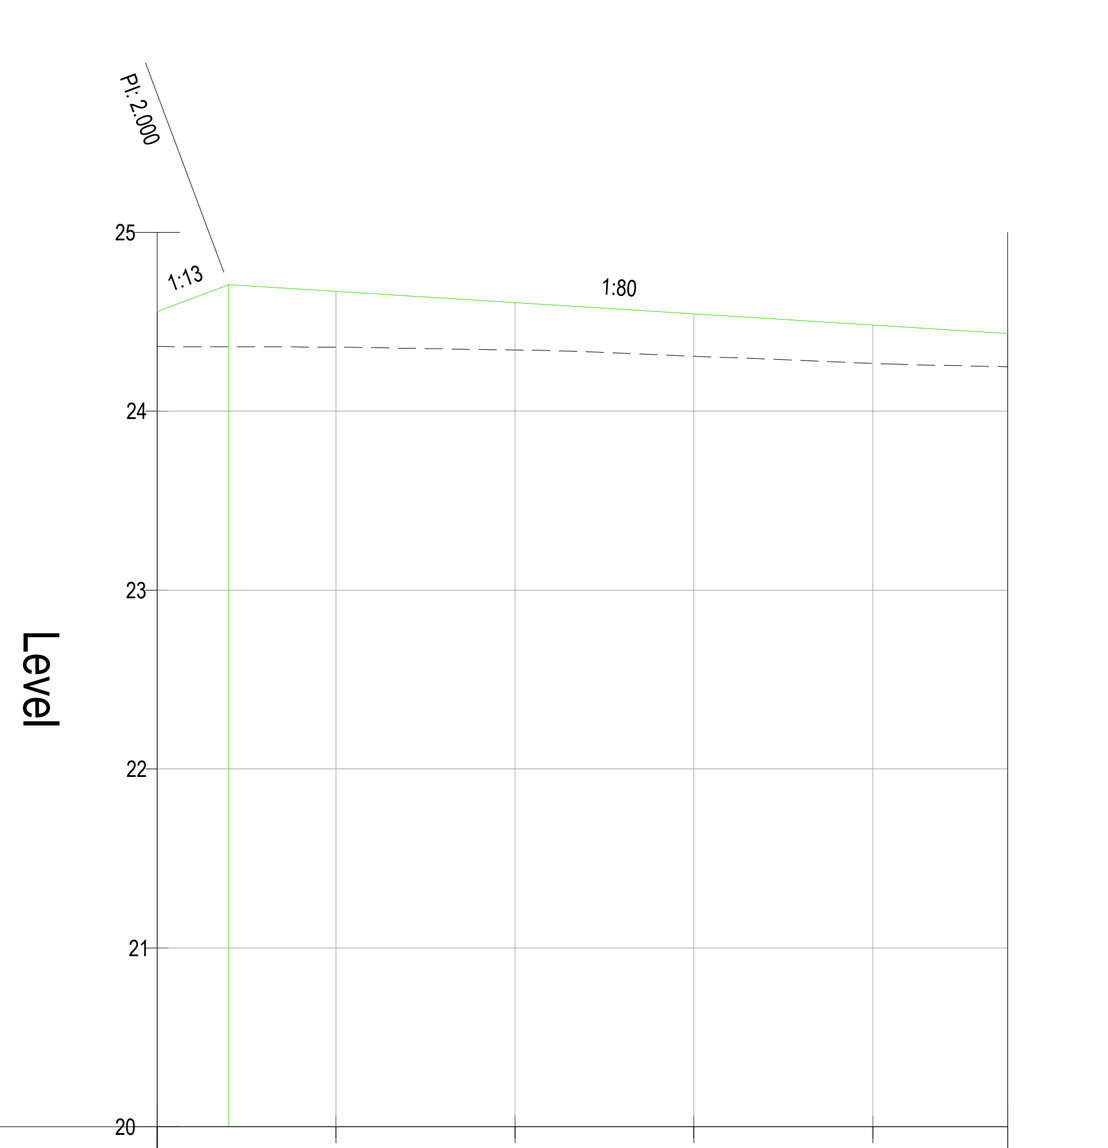


Row						
Chainage	00.000	05.000	10.000	15.000	20.000	23.774
Existing Levels	24.361	24.358	24.342	24.308	24.267	24.248
Proposed Levels	24.557	24.669	24.607	24.544	24.482	24.435
Horizontal Geometry	L =2.000	L =21.774				
Vertical Geometry	G =7.500% L =2.000	G =-1.250% L =21.774				
Surface Water CL						
Surface Water IL						
Surface Water Details						
Foul Water CL						
Foul Water IL						
Foul Water Details						

PD 06 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

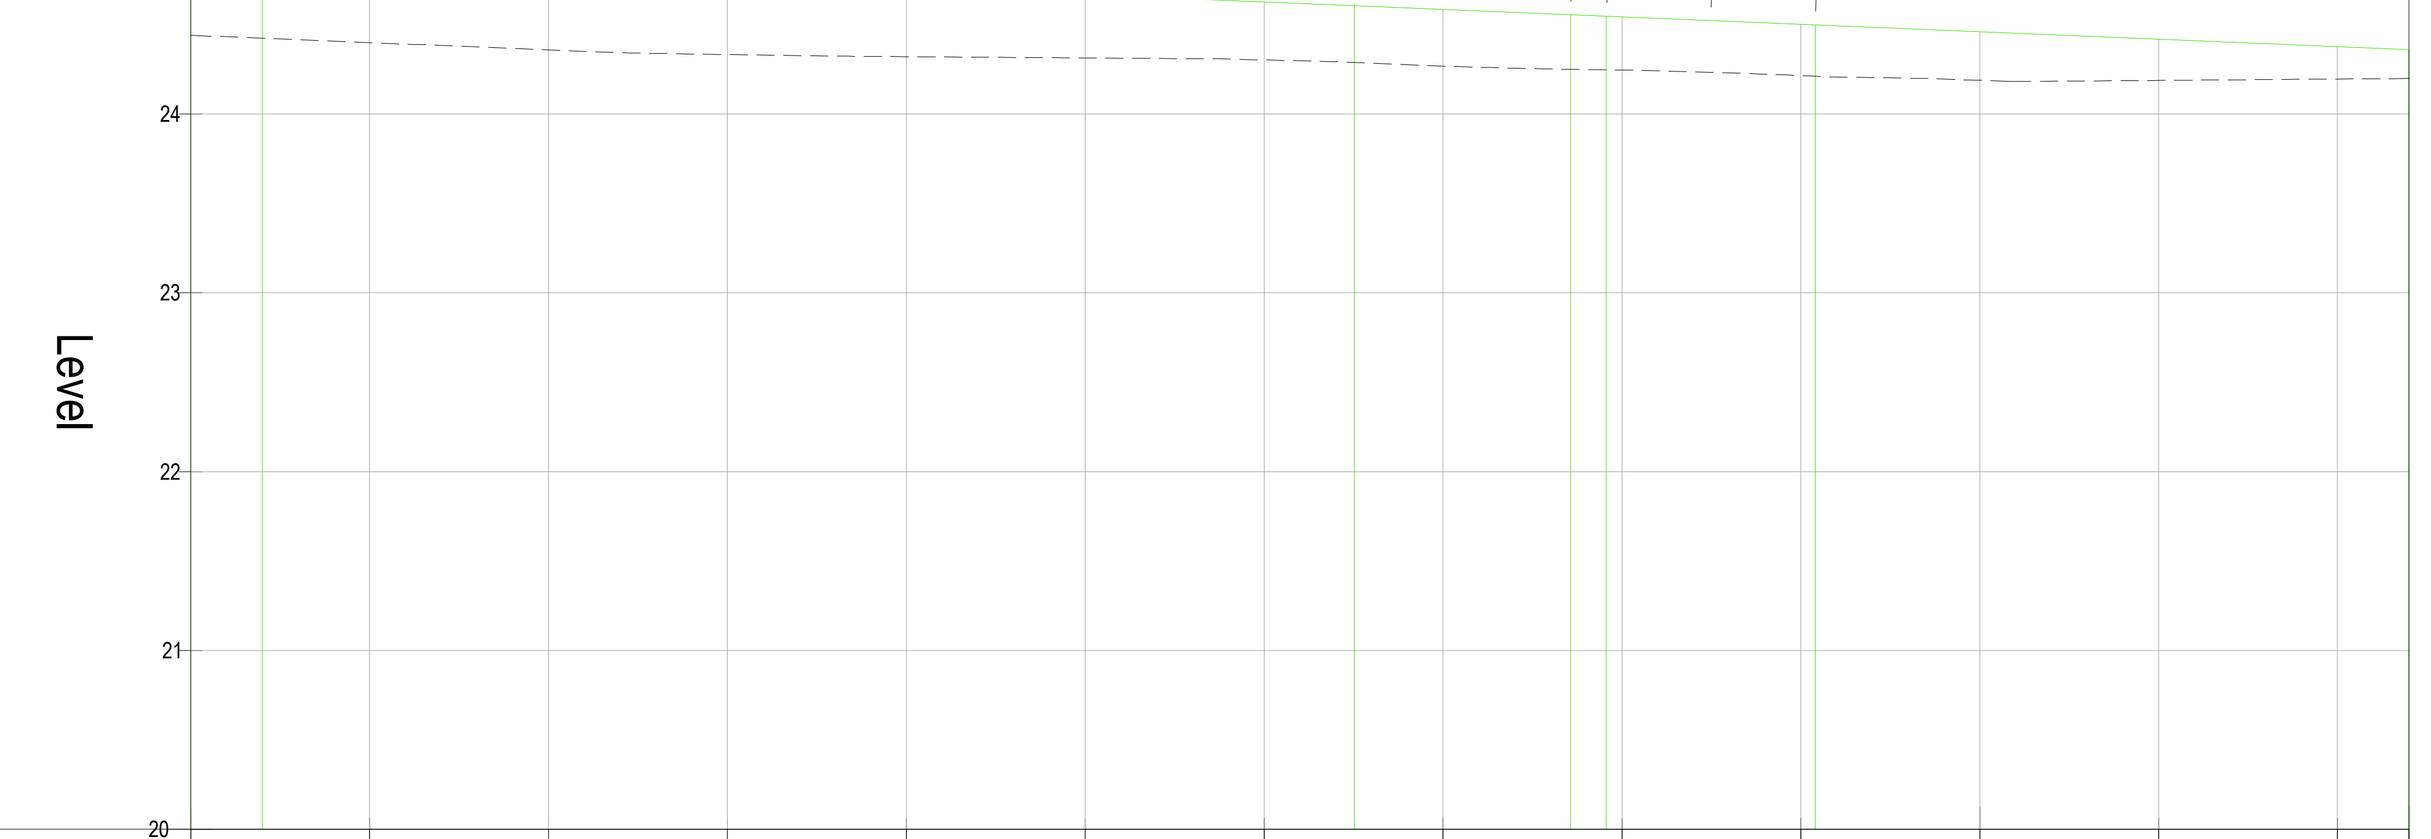


Row														
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	55.000	60.000	62.000
Existing Levels	24.439	24.398	24.358	24.332	24.320	24.313	24.301	24.267	24.245	24.214	24.187	24.187	24.194	24.197
Proposed Levels	24.711	24.834	24.792	24.751	24.709	24.667	24.626	24.584	24.542	24.501	24.459	24.417	24.376	24.359
Horizontal Geometry	L =2.000	L =30.522	R: 7.500 L: 6.041	L =1.000	R: 7.500 L: 5.833	L =16.604								
Vertical Geometry	G =7.400% L =2.000	G =-0.833% L =60.000												
Surface Water CL														
Surface Water IL														
Surface Water Details														
Foul Water CL														
Foul Water IL														
Foul Water Details														

PD 07 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

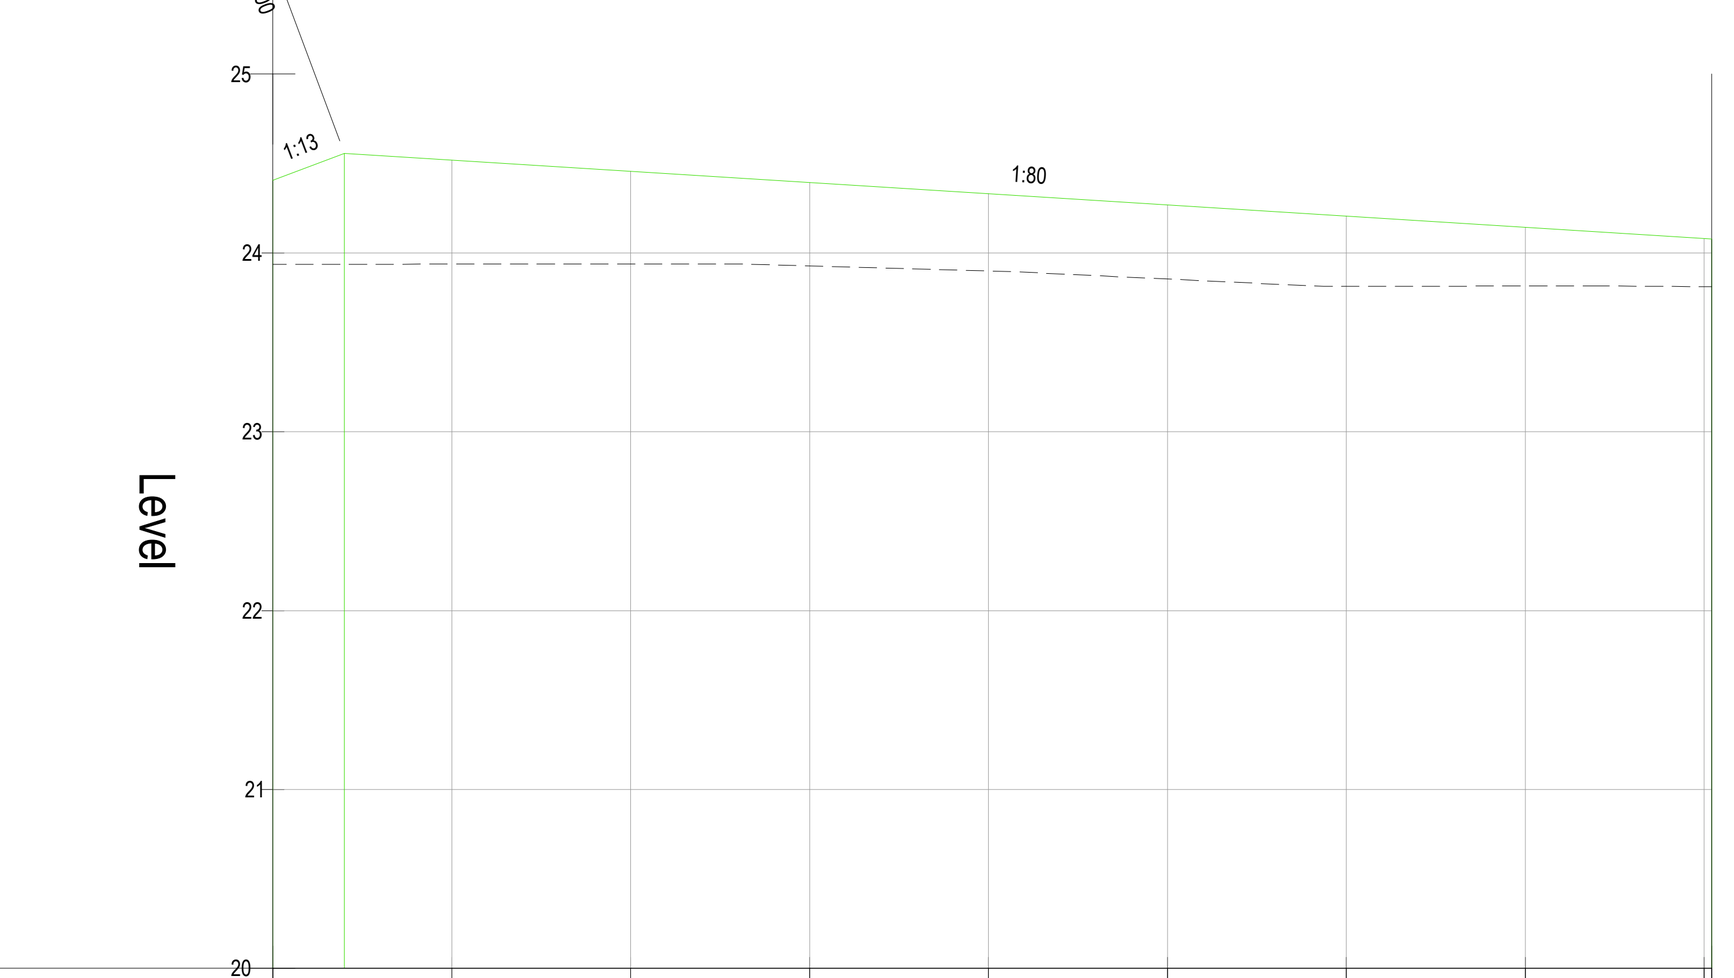


Row									
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	30.000	35.000	40.217 / 40.000
Existing Levels	23.936	23.937	23.938	23.927	23.899	23.854	23.812	23.815	23.811 / 23.811
Proposed Levels	24.405	24.518	24.455	24.393	24.330	24.268	24.205	24.143	24.078 / 24.080
Horizontal Geometry	L =2.000	L =38.217							
Vertical Geometry	G =7.500% L =2.000	G =-1.250% L =38.217							
Surface Water CL									
Surface Water IL									
Surface Water Details									
Foul Water CL									
Foul Water IL									
Foul Water Details									

PD 08 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

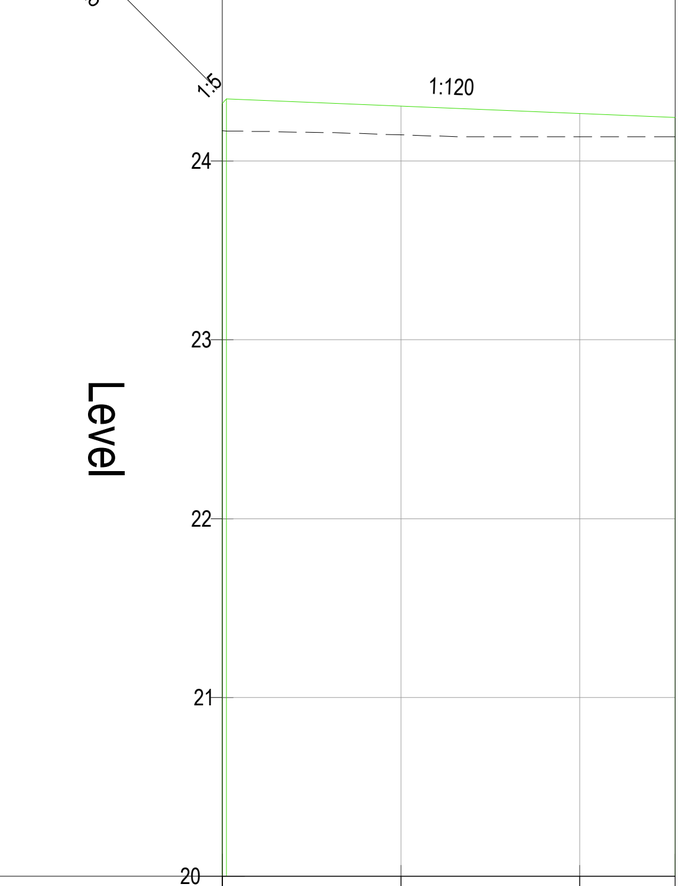

Row				
Chainage	00.000	05.000	10.000	12.663
Existing Levels	24.168	24.145	24.134	24.134
Proposed Levels	24.321	24.305	24.264	24.242
Horizontal Geometry	L =0.125	L =12.538		
Vertical Geometry	G =20.000% L =0.125	G =-0.833% L =12.538		
Surface Water CL				
Surface Water IL				
Surface Water Details				
Foul Water CL				
Foul Water IL				
Foul Water Details				

PD 09 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

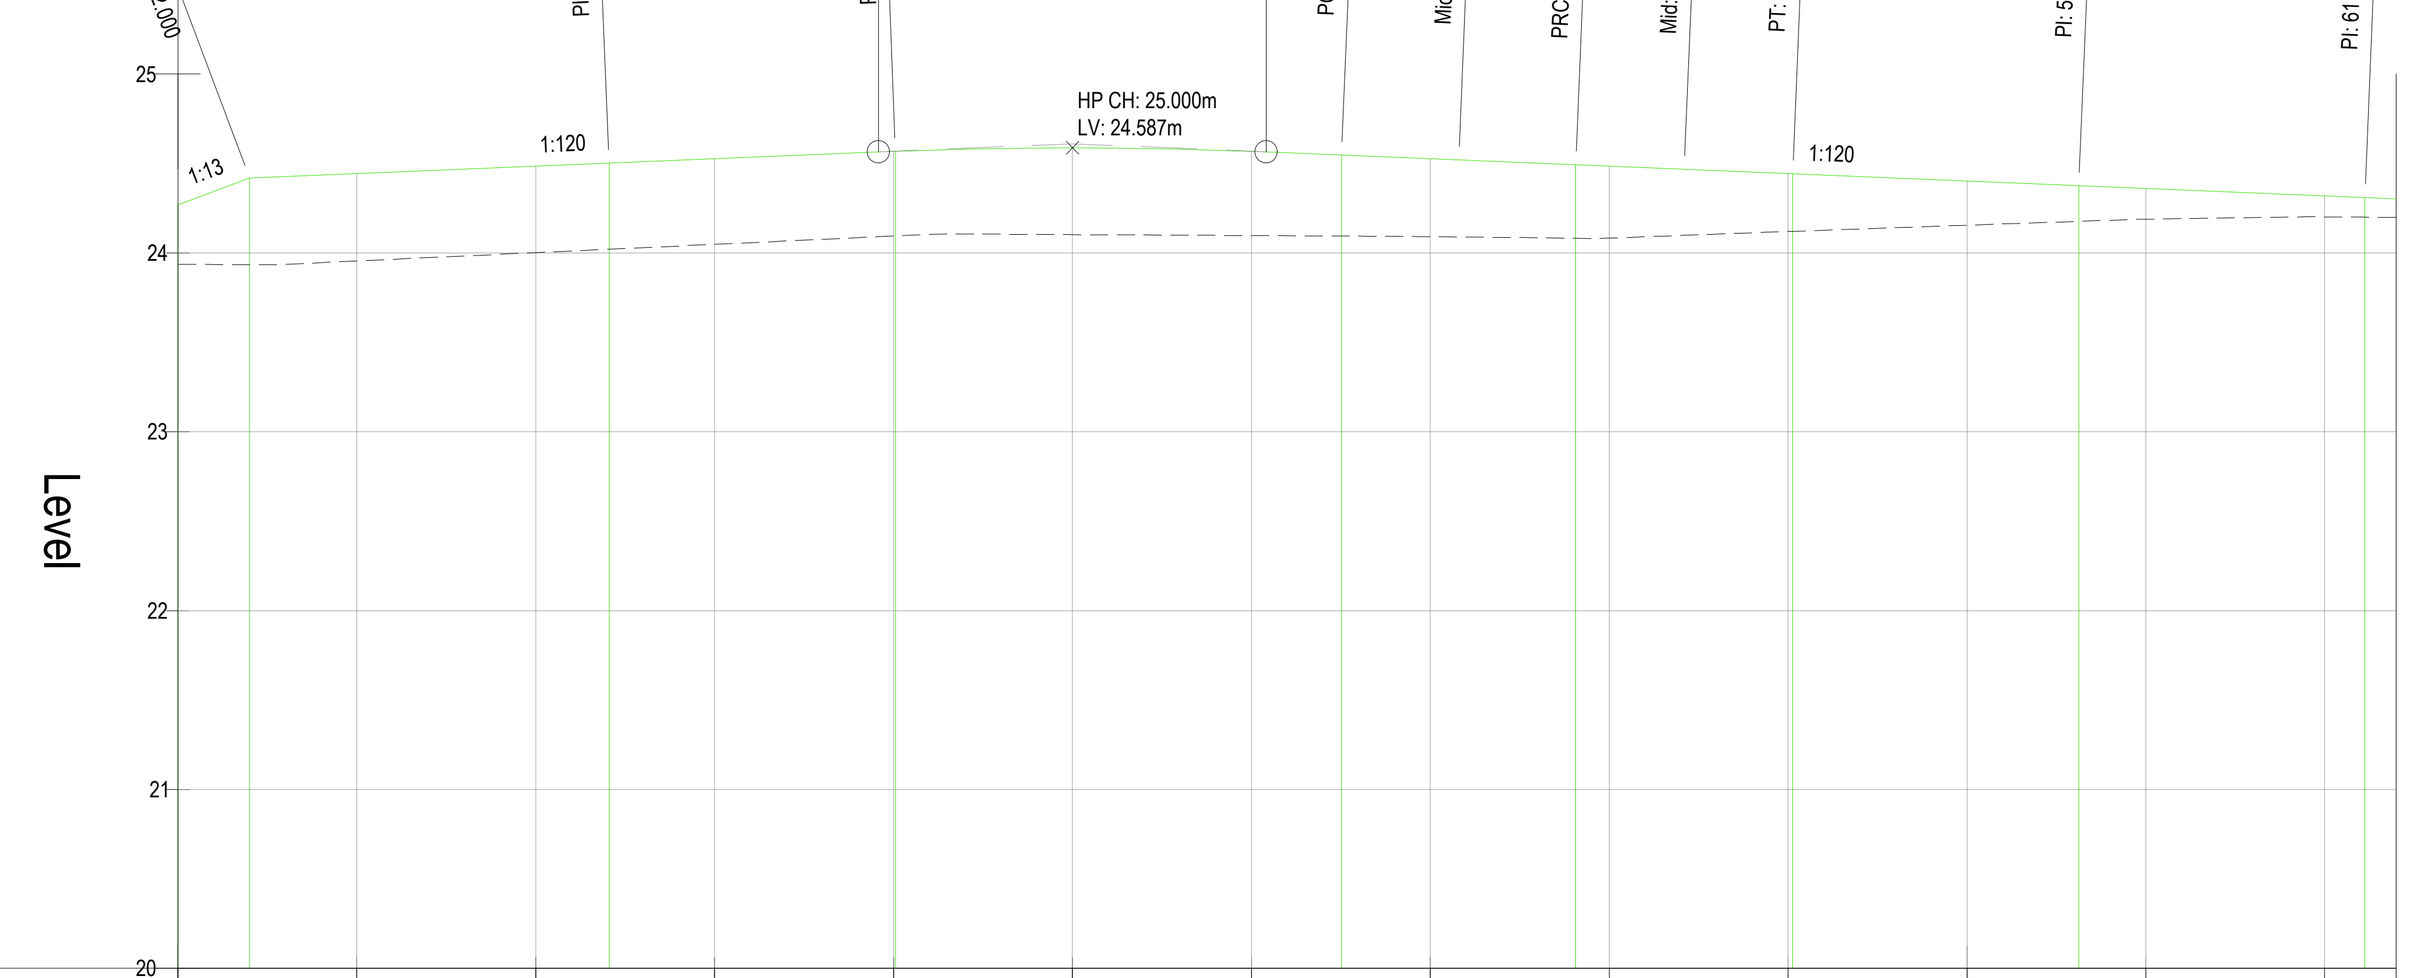

Row														
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	30.000	35.000	40.000	45.000	50.000	55.000	60.000	61.992
Existing Levels	23.935	23.954	24.001	24.048	24.094	24.102	24.097	24.090	24.082	24.119	24.154	24.188	24.201	24.198
Proposed Levels	24.268	24.443	24.485	24.526	24.568	24.587	24.568	24.526	24.485	24.443	24.401	24.360	24.318	24.301
Horizontal Geometry	L =2.000	L =10.050	L =8.000	L =12.472	R: 7.500 L: 6.541	R: 7.498 L: 6.064	L =7.995	L =8.000	L =0.870					
Vertical Geometry	G =7.500% L =2.000	G =0.833% L =17.583	R =649.981 K =6.500 L =10.833	G =-0.833% L =31.576										
Surface Water CL														
Surface Water IL														
Surface Water Details														
Foul Water CL														
Foul Water IL														
Foul Water Details														

PD 10 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000



Row							
Chainage	00.000	05.000	10.000	15.000	20.000	25.000	29.404
Existing Levels	24.356	24.306	24.268	24.261	24.254	24.246	24.247
Proposed Levels	24.182	24.357	24.399	24.440	24.482	24.524	24.560
Horizontal Geometry	L =2.000	L =27.404					
Vertical Geometry	G =7.513% L =2.000	G =0.833% L =27.404					
Surface Water CL							
Surface Water IL							
Surface Water Details							
Foul Water CL							
Foul Water IL							
Foul Water Details							

PD 11 - LONGSECTION
SCALE: H 1:250,V 1:50. DATUM: 20.000

GENERAL SAFETY NOTES:

1. WHERE THE BASE (ROAD BASE) HAS BEEN USED AS A TEMPORARY RUNNING SURFACE DURING THE CONTRACT IT SHALL BE THOROUGHLY CLEANED AND POWER WASHED AS NECESSARY. AFTER DRYING AND IMMEDIATELY BEFORE THE BINDER COURSE IS LAID A TACK COAT OF BITUMEN EMULSION CLASS A1-40 OR K1-40 TO BS434 SHALL BE APPLIED AT A RATE OF 0.35-0.55 LITRES/SQ METER.
2. ALL RADIUS KERBS WITH A RADIUS OF 12m OR LESS SHALL BE FORMED WITH PROPRIETARY RADIUS KERBS.

HEALTH & SAFETY:

1. CONTRACTOR SHOULD BE AWARE OF GENERAL CONSTRUCTION RISKS TO PREVENT SLIPS, TRIPS AND FALLS AND TAKE NECESSARY PRECAUTIONS WITHOUT SPECIAL INSTRUCTION.

ROADS & DRAINAGE

2. CONTRACTOR TO PROVIDE TRENCH SUPPORTS AS APPROPRIATE AND ENSURE THAT PLANT REMAINS A SAFE DISTANCE FROM TRENCHES PRIOR TO INSTALLING DRAINAGE
3. THE TIME THAT EXCAVATIONS ARE OPEN ON SITE SHOULD BE KEPT TO A MINIMUM AND ALL TRENCHES SHOULD BE SURROUNDED BY A BARRIER.
4. CONNECTIONS TO EXISTING SEWERS TO BE MADE BY APPROVED CONTRACTOR ONLY.
5. CONTRACTOR TO MAKE OPERATIVES AWARE OF ASSOCIATED DANGERS TO HEALTH SUCH AS LEPTOSPIROSIS (WEILS DISEASE) AND RECOMMENDED PRECAUTIONS. ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING TO BE PROVIDED AS REQUIRED.
6. UNFINISHED MANHOLES MUST BE COVERED WITH LOAD BEARING MATERIALS AND SURROUNDED WITH BARRIER.

PIPES & CABLES

7. CONTRACTOR TO OBTAIN ALL SERVICE RECORDS PRIOR TO WORKS COMMENCING.
8. SERVICE RECORDS TO BE REFERRED TO PRIOR TO WORK COMMENCING. CONTRACTOR TO PROCEED WITH CAUTION AND SERVICES TO BE LOCATED BY HAND DIG AND PROTECTED ACCORDINGLY.

EXCAVATION/FILL

9. CONTRACTOR TO ENSURE RELEVANT MEASURES ARE TAKEN TO KEEP PLANT AND PEOPLE A SAFE DISTANCE FROM STEEP SLOPES DURING THE WORKS.
10. CONTRACTOR TO ENSURE THAT PROCEDURES ARE IN PLACE TO KEEP PEOPLE A SAFE DISTANCE FROM WORKING PLANT WHERE NECESSARY.
11. CONTRACTOR TO REFER TO GROUND INVESTIGATION REPORT FOR CONTAMINATION TESTS AND TO PROVIDE ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING AS REQUIRED.

DRAINAGE SPECIFICATIONS WATER COMPANY

1. ALL ADOPTABLE DRAINAGE WORKS AND MATERIALS TO BE IN ACCORDANCE WITH "SEWERS FOR ADOPTION" 6TH EDITION, THE RELEVANT BRITISH/EUROPEAN AND WATER COMPANIES STANDARDS/REQUIREMENTS/ADDENDUM TO THE MECHANICAL AND ELECTRICAL SPECIFICATION AND KITEMARKED.
2. MANHOLE COVERS SHALL/MUST HAVE A CLEAR OPENING OF 600MM AND SHALL BE CLASS D400 TO BS EN 124 WITH 150MM DEEP FRAMES IN HIGHWAYS.
3. FILLED GROUND MUST BE FILLED AND CONSOLIDATED UNDER THE SUPERVISION AND TO THE SATISFACTION OF WATER COMPANY BEFORE ANY SEWER WORKS ARE CARRIED OUT.
4. ALL ADOPTABLE SEWERS TO BE KITEMARKED (CERTIFIED TO WIS 4-35-01 AND BS/EN13476).
5. PLASTIC CHANNEL SECTIONS IN MANHOLES ARE NOT ACCEPTABLE AND THE WATER AUTHORITY PREFER CLAYWARE CHANNEL IN MANHOLES. PLASTIC CHANNELS ARE DIFFICULT TO SET IN CONCRETE BECAUSE THEY FLOAT AND A SATISFACTORY FINISH CANNOT BE OBTAINED ON THE BENCHING.
6. THE WATER AUTHORITY IS NOT OBLIGED TO ACCEPT FILTER DRAIN/LAND DRAINAGE RUN-OFF INTO THE PUBLIC SEWER NETWORK OR ADOPTABLE DRAINAGE SYSTEM (DIRECTLY OR IN-DIRECTLY). AN ALTERNATIVE METHOD OF DISPOSAL OF THE LAND DRAINAGE RUN-OFF WILL THEREFORE BE REQUIRED AND YOU WILL HAVE TO LIAISE WITH THE LOCAL AUTHORITY, LAND DRAINAGE SECTION WITH REGARD TO THE DISPOSAL OF THE FILTER DRAIN/LAND DRAINAGE RUN-OFF.
7. OVER SLABS MUST CARRY THE BSI KITEMARK OR WILL BE REJECTED BY WATER COMPANY INSPECTOR. WHERE THE CLEAR OPENING OF THE KITEMARKED PRODUCT IS DIFFERENT TO THAT OF THE COVER AND FRAME, A LOADING BEARING SLAB SHOULD BE FITTED ABOVE THE COVER SLAB TO BRING THE SIZE DOWN TO 600MM X 600MM FOR THE WATER COMPANY SPECIFIED COVER SIZE. PLEASE REFER TO CONCRETE PIPE SYSTEMS ASSOCIATION (CPSA), 'TECHNICAL BULLETIN' ISSUED AUTUMN 2004 FOR KITEMARKED COVER SLAB OPENING SIZES.
8. SULPHATE RESISTANT CEMENT (C20-DC2) AND PRECAST CONCRETE PRODUCTS MUST BE USED OR A LABORATORY REPORT PROVIDED PROVING THAT SUCH PRECAUTIONS ARE NOT NECESSARY.
9. THE ADOPTABLE SEWERS SHOULD BE A MINIMUM OF 1M AND MANHOLES 0.5M FROM KERB FACES AND SERVICE MARGINS.
10. "SEWERS MUST HAVE 5 METRES CLEARANCE FROM TREES AND HEDGES (PLEASE ALSO REFER TO FIGURE 2.3 ON PAGE 33 IN "SEWERS FOR ADOPTION" 6TH EDITION FOR RESTRICTIONS ON TREE PLANTING ADJACENT TO SEWERS)".
11. SEWERS TO BE LAID IN CLASS "S" BEDDING (150MM GRANULAR BED AND SURROUND). WHERE DEPTH OF COVER TO TOP OF THE SEWER IS LESS THAN 1.2M IN HIGHWAYS AND VERGES (OR LESS THAN 900MM IN NONE VEHICULAR ACCESS AREAS) THEN A CONCRETE SLAB SHOULD BE PROVIDE ABOVE GRANULAR BED AND SURROUND.
12. BEDDING AND BACKFILL MATERIAL TO CONFORM TO THE REQUIREMENT OF WATER INDUSTRY SPECIFICATION 4-08-02 (TABLE A2).
13. THE CHAMBER SIZE OF MANHOLES WITH MORE THAN ONE CONNECTION IN THEM MAY NEED TO BE INCREASED AN INCREMENT TO ACCOMMODATE THE CONNECTIONS AND BENDS.
14. WATER COMPANY POLICY IS NOT TO ACCEPT TYPE "C" BRICK MANHOLES AND 1050MM DIA MANHOLE RINGS. INSTEAD IT IS PREFERRED THAT YOU USE A TYPE "B" MANHOLE WITH 1200MM DIA OR 1500MM DIA RINGS, WITH THE OPENING SITED OVER THE CHANNEL WHERE DEPTH OF COVER TO PIPE SOFFIT IS 1 - 1.5M.
15. ALL PRIVATE DRAINAGE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH BUILDING REGULATIONS 2002 EDITION.
16. CONTRACTOR TO ESTABLISH POSITION SIZE AND DEPTH OF ALL EXISTING SEWERS AND SERVICES PRIOR TO COMMENCEMENT ON SITE.
17. THE CONTRACTOR SHALL ALLOW FOR THE PROTECTION, TEMPORARY AND PERMANENT SUPPORT, AND TEMPORARY AND PERMANENT DIVERSION WORKS, AS NECESSARY TO ALL EXISTING SERVICES.
18. THE CONTRACTOR SHALL ALLOW FOR ALL TRAFFIC MANAGEMENT IN CONNECTION WITH ROAD AND SEWER WORKS.
19. THE CONTRACTOR SHALL ALLOW FOR KEEPING SEWER TRENCHES AND EXCAVATIONS AS DRY AS PRACTICABLE BY PUMPING FROM TEMPORARY SUMPS AND DEWATERING AS APPROPRIATE. THE POINT AND METHOD OF DISCHARGE TO BE AGREED WITH THE DRAINAGE AUTHORITY.
20. FOR PIPE SPECIFICATION PLEASE REFER TO ADDITIONAL NOTES.
21. VITRIFIED CLAY PIPES AND FITTINGS SHALL COMPLY WITH THE RELEVANT PROVISIONS OF BS EN295 AND BS 65 RESPECTIVELY AND BE KITEMARKED. ALL PIPES SHALL BE EXTRA STRENGTH TO BS 65 OR EQUIVALENT BS EN295 PIPE CRUSHING STRENGTH.
22. STRUCTURED WALL PLASTIC PIPES TO WIS 4-35-01 MAY BE USED FOR FOUL & SURFACE WATER DRAINAGE, SUBJECT TO ADOPTING AUTHORITY APPROVAL.
23. PRECAST CONCRETE PRODUCTS SHALL COMPLY WITH THE RELEVANT PROVISIONS OF BS 5911 AND BE KITEMARKED. CONCRETE PIPES TO BE CLASS 120 UNLESS NOTED OTHERWISE.
24. GULLY GRATES AND FRAMES SHALL COMPLY WITH THE RELEVANT PROVISIONS OF BS EN124 AND BE OF A NON-ROCKING DESIGN WITH CAPTIVE HINGE ACCESS AND BE KITEMARKED. LOAD CLASS D400 FOR ROADS AND SERVICE YARD AREAS. CLASS C250 TO BE USED IN CAR PARKING AREAS.
25. BACKFILLING AND REINSTATEMENT TO TRENCHES IN PUBLIC HIGHWAYS SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS AND SPECIFICATIONS OF THE ADOPTING AUTHORITY, OR, IN THE ABSENCE OF SUCH, IN ACCORDANCE WITH THE REQUIREMENTS OF "THE STREET WORKS REGULATIONS 1992" AND RELEVANT PROVISIONS OF H.A.U.C. "SPECIFICATION FOR THE REINSTATEMENT OF OPENINGS IN HIGHWAYS" JUNE 1992, BOTH UNDER SECTION 71 OF THE NEW ROADS AND STREET WORKS ACT 1991.
26. ALL TRADITIONAL RAINWATER PIPE DOWN COMERS TO DISCHARGE TO TRAPPED GULLIES.
27. ALL SIPHONIC DRAINAGE DOWN COMERS TO MANUFACTURER SPECIFICATION.
28. ALL ROAD GULLIES ARE TO BE TRAPPED GULLIES.
29. ALL GULLY LEADS TO BE 150mm DIAMETER.
30. ALL REDUNDANT EXISTING DRAINAGE TO BE GRUBBED UP OR GROUTED, ANY EXISTING LIVE DRAINAGE SHOULD BE REPORTED TO THE ENGINEER AND RECONNECTED.
31. ALL ROAD GULLIES & LEADS TO BE CLEARED OF DEBRIS UPON COMPLETION OF WORKS.
32. THE CONTRACTOR MUST ENSURE THAT ANY OF THE EXISTING DRAINAGE WHICH IS LIVE IS KEPT CLEAR OF DEBRIS AND SHOULD ALLOW FOR JETTING THROUGH THE NEW & EXISTING DRAINAGE UPON COMPLETION.
33. CONTRACTOR TO TAKE MEASURES TO PROTECT HIS OPERATIVES WITH RESPECT TO THE PRESENCE OF GAS IN SEWER TRENCHES AND MANHOLES THROUGH THE USE OF GAS MONITORING EQUIPMENT AND BREATHING APPARATUS AS REQUIRED.
34. CONTRACTOR TO APPLY FOR SEWER PERMITS AND ROAD OPENING PERMITS AS NECESSARY FROM THE APPROPRIATE AUTHORITIES, PRIOR TO COMMENCING WORKS.
35. ADOPTABLE PLASTIC SEWER PIPES TO BE LAID IN MAXIMUM 3m LENGTHS UNLESS THERE IS A SPECIFIC OPERATIONAL NEED TO LAY LONGER LENGTHS.
36. WHERE PLASTIC PIPES ARE INSTALLED PRIOR TO GETTING APPROVAL THEN A LIGHT LINE CCTV SURVEY AND REPORT ARE REQUIRED PRIOR TO APPROVAL.

DESIGN NOTES:

1. ALL WORKS TO COMPLY WITH CURRENT VERSION OF THE FOLLOWING DOCUMENTS:
   - DESIGN MANUAL FOR ROADS AND BRIDGES (DMRB)
   - SPECIFICATION FOR HIGHWAY WORKS (SHW)
   - LOCAL AUTHORITY DESIGN GUIDE AND SPECIFICATION
2. PRIOR TO COMMENCING WORKS THE CONTRACTOR SHOULD INVESTIGATE AND LOCATE AS NECESSARY ANY STATUTORY UNDERTAKERS EQUIPMENT WITHIN THE NEW ACCESS AND DISCUSS REQUIREMENTS FOR LOWERING/DIVERSION AND PROTECTION WITH THE RELEVANT UNDERTAKER.
3. ALL WORKS WITHIN THE PUBLIC HIGHWAY TO MEET LOCAL AUTHORITY REQUIREMENTS. CONTRACTOR TO APPLY FOR ROAD OPENING NOTICES ETC AS REQUIRED.
4. CBR VALUE NOT AVAILABLE. ROAD CONSTRUCTION DETAIL SUBJECT TO CONFIRMATION OF CBR VALUES. CONTRACTOR TO ALLOW FOR LAB TESTS TO BE UNDERTAKEN IN AGREEMENT WITH LOCAL AUTHORITY HIGHWAY ENGINEER PRIOR TO WORKS COMMENCING.
5. PROPOSED LEVELS HAVE BEEN BASED ON THE EXISTING TOPOGRAPHICAL SURVEY RECEIVED **JUNE 2020**.
6. PROPOSED DRAWING BASED ON ARCHITECTURAL LAYOUT FROM DEVELOPER RECEIVED **JUNE 2020**.
7. SLOPES GREATER THAN 1 IN 6 MAY REQUIRE STABILISATION. GEOTECHNICAL ENGINEER TO BE CONTACTED TO CONFIRM REQUIREMENTS

DRAINAGE NOTES:

1. ALL PIPES 100Ø UNLESS OTHERWISE STATED.
2. ALL PRIVATE TO ADOPTABLE CONNECTIONS 150Ø UNLESS OTHERWISE STATED.
3. ALL PPIC'S IN TRAFFICKED AREAS TO HAVE D400 COVERS & CONCRETE SURROUND.
4. ALL INTERNAL PLOT DRAINAGE REQUIRES CONFIRMATION PRIOR TO CONSTRUCTION.
5. CONTRACTOR TO CONFIRM MH COVER & INVERT LEVEL OF PROPOSED CONNECTION POINT PRIOR TO CONSTRUCTION. ANY VARIATION TO BE REPORTED TO ENGINEER.
6. THE INVERT LEVEL OF THE EXISTING SEWERS ARE TO BE VERIFIED PRIOR TO COMMENCEMENT OF ANY DRAINAGE WORKS. ANY DISCREPANCY MUST BE NOTIFIED TO THE ENGINEER.
7. EXISTING MANHOLES TO BE MODIFIED TO ACCOMMODATE THE PROPOSED LATERAL CONNECTIONS. CONTRACTOR TO APPLY TO THE WATER AUTHORITY FOR THE SECTION 106 APPROVAL TO MAKE THE CONNECTIONS. PIPES ARE TO BE LAID WITH COMMON INVERT LEVELS.
8. ALL STUB PIPES ARE TO BE CAPPED.
9. ALL PIPES CONNECTIONS TO BE SOFFIT TO SOFFIT UNLESS STATED OTHERWISE. REFER TO MANHOLE SCHEDULE FOR FURTHER INFORMATION.
10. ALL PROPOSED FILTER DRAINS TO CONNECT BACK INTO PLOT DRAINAGE.
11. STONE FILLED LAND DRAINS REQUIRED IN BACK GARDENS WHERE FALLING TOWARDS PROPERTY
12. FLOOD DEFENSE WORKS APPLICATION OR EQUIVALENT TO BE MADE TO THE LOCAL AUTHORITY PRIOR TO CARRYING OUT ANY WORKS TO THE EXISTING WATERCOURSE.

PIPE MATERIALS

- **150-225Ø: UPVC PIPES TO BE BSI KITEMARKED AND CERTIFIED TO WIS 4-35-01 & BS/EN13476.**
- **300-900Ø: CONCRETE PIPES TO BE BSI KITEMARKED, CLASS 120 CONCRETE & CERTIFIED TO BS5911 & 1916.**

KEY

- EXISTING LEVELS
- PROPOSED LEVELS
- PROPOSED ADOPTED SW
- PROPOSED ADOPTED FW
- PROPOSED HIGHWAY DRAINAGE

SUBJECT TO LOCAL AUTHORITY & WATER AUTHORITY APPROVAL

Date	Revisions	Drawn	Checked	Rev
08/04/2025	LEVELS AMENDED. LONGSECTIONS AMENDED TO SUIT.	JS	AGM	7
20/12/2024	DESIGN TAKEN BACK TO TENDER STAGE.	LM	AGM	6
16/10/2023	SECTIONS UPDATED TO SUIT LATEST SITE LAYOUT.	AM	AE	5
07/07/2023	ROAD 50 UPDATED TO SUIT REVISED LAYOUT	AM	AE	4
25/08/2022	SECTIONS UPDATED TO REFLECT ADOPTABLE DRAINAGE	LM	AGM	3
22/04/2022	SECTIONS UPDATED TO TENDER DESIGN	LM	AGM	2
03/07/2020	FIRST ISSUE	AGM	AE	1

Dwg Status: TENDER

NORTH EAST 0191 2585632
YORKSHIRE 0113 535 3500
RWO
CONSULTING ENGINEERS
WWW.RWO.GROUP
INFO@RWO.GROUP

Client: TAYLOR WIMPEY & BARRATT HOMES

Project: NORTON LODGE

Title: LONGSECTIONS SHEET 14 OF 18

DO NOT SCALE	Scale @ A0: 1:250	Drawn AGM	Checked AE	Date 02.07.2020
Job No 19185		Dwg No D313		Rev 7